

GMMA-100D

Double Cutter Edge Milling Machine

Features

Bevel angle adjustable	OL protection(Spindle QF)
Spindle speed adjustable	Digital display
Feed speed adjustable	24V control box, more safe
OL protection(Feed QF)	Auto clamping
Dense teeth Cutter Head	Standard milling inserts

Specification

Power Supply	AC 380V 50HZ
Total Power	6700W
Spindle Speed	500~1050r/min
Feed Speed	0~1500mm/min
Plate Thickness	6~100mm
Plate Width	≥100mm
Processing Length	≥400mm
Bevel Angle	0°~90°Adjustable
Single pass Bevel Width	0~30mm
Bevel Width	0~60mm
Cutter Dia.	2*Φ63mm
Cutter Qty	2*6pcs
Worktable Height	810~870mm
Travel Space	1200*1200mm
Net Weight	430kg
Gross Weight	490kg
Package Size	950*1180*1430mm



a	0°	30°	37.5°	45°	90°
w	60mm	52mm	53mm	55mm	40mm

(Bevel angle) Bevel width


Application



Performance parameter & Bevel Type

6.7kwh Energy Consumption **580W** Double Feed Motor **24V** Control Box Voltage

Ra3.2~6.3 Surface **0°~90°** Bevel Angle **60mm** Max.Bevel Width

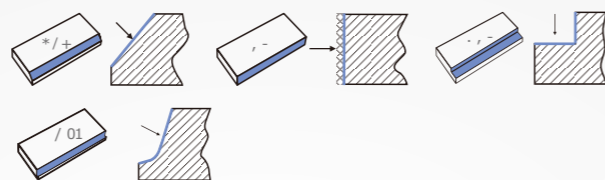

GMMA-100K

K Bevel Edge Milling Machine

Features

Bevel angle adjustable	OL protection(Spindle QF)
Spindle speed adjustable	Digital display
Feed speed adjustable	24V control box, more safe
OL protection(Feed QF)	Auto clamping
Dense teeth Cutter Head	Standard milling inserts

Specification

Power Supply	AC 380V 50HZ
Total Power	6480W
Cutting Power	2*3000W
Feed Motor	2*180W
Spindle Speed	500~1050r/min
Feed Speed	0~1500mm/min
Plate Thickness	6~100mm
Plate Width	≥100mm
Processing Length	≥400mm
Single pass Bevel Width	0~20mm
Upper Angle	0°~90°Adjustable
Lower Angle	0°~-45°Adjustable
Upper Bevel Width	0~60mm
Lower Bevel Width	0~45mm
Cutter Dia.	2*Φ63mm
Cutter Qty	2*6pcs
Worktable Height	810~870mm
Travel Space	800*800mm
Net Weight	395kg
Gross Weight	460kg
Package Size	950*1180*1430mm

Application



Performance parameter & Bevel Type

6.48kwh Energy Consumption **360W** Double Feed Motor **24V** Control Box Voltage

Ra3.2~6.3 Surface **-45°~0°~90°** Bevel Angle **60mm** Max.Bevel Width

